



QUICK GUIDE

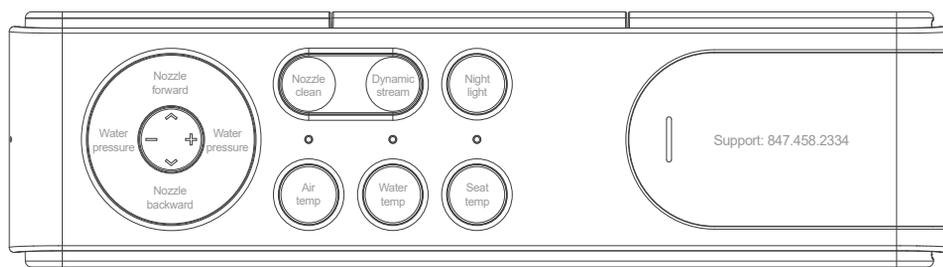

REMOTE

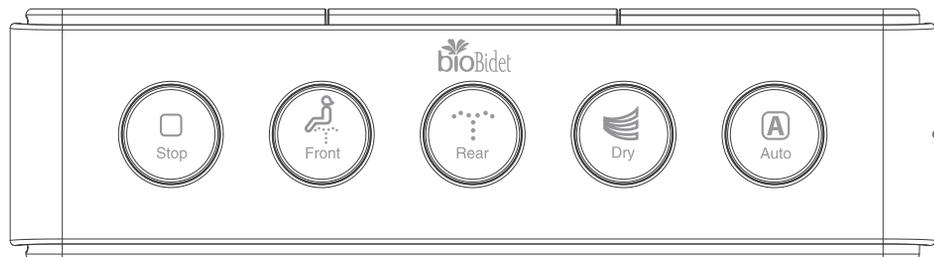

FUNCTIONS

OPEN/CLOSE LID

Open or close the lid.

OPEN/CLOSE SEAT

Open or close the seat.

NIGHT LIGHT

Turns the night light on/off.

FRONT

Activate oscillating front wash.
Press again to turn off oscillation.

REAR

Activate oscillating rear wash.
Press again to turn off oscillation.

STOP

Stop any operation.

DRY

Press to activate the warm air dryer.
Press again to adjust the fan speed.
Low - Blue | Medium - Purple | High - Red
The dryer automatically turns off after 4 minutes.

AUTO

Activates a rear wash for 90 seconds,
followed by the dryer for 4 minutes.
Press again to skip to dryer function.

DYNAMIC STREAM

Activate during a wash to quickly alternate
the water temperature from warm to cold.

NOZZLE CLEAN

Extends the nozzle for manual cleaning.
The seat must be unoccupied.

SETTINGS

WATER TEMPERATURE | AIR TEMPERATURE | SEAT TEMPERATURE

Press the corresponding button to adjust the temperature settings.
Low - Blue | Medium - Purple | High - Red

WATER PRESSURE

Press the + or - buttons to adjust the water pressure accordingly.

NOZZLE POSITION

Press the arrow keys to adjust the position of the nozzle accordingly.



CONGRATULATIONS ON YOUR PURCHASE

Our goal is to provide you with the highest quality products and service possible.


If there is anything we can do to assist with your purchase, we have trained customer service professionals waiting to assist you. Please feel free to connect with us via phone, email, or chat.

Water Does it Better®

QUICK INSTALLATION GUIDE


Attaching the rubber anchors

Remove the existing toilet seat and insert the rubber anchors into the mounting holes.



Attaching the mounting plate

Place the catch plate and guides over the mounting holes. Insert the mounting screw and secure the catch plate to the toilet.

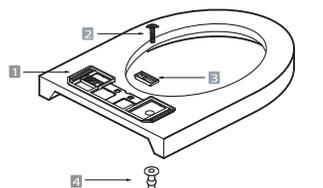

- 1 mounting plate
- 2 mounting bolt
- 3 guide
- 4 rubber anchor

Attaching the bidet seat

Slide the bidet seat all the way on to the catch plate.




Seat sensor

This appliance is equipped with a seat sensor and will not function unless occupied.



Connecting the water hose

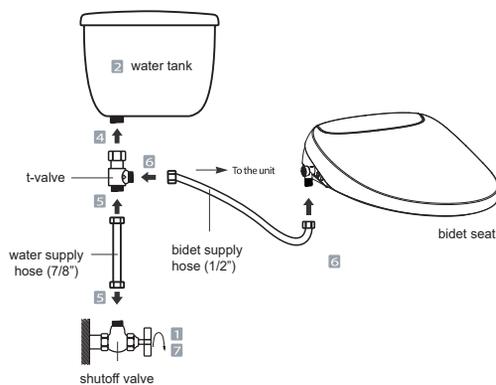

- 1 Close the water shutoff valve.
- 2 Flush the toilet to empty the tank.
- 3 Remove the existing water supply hose from the tank.
- 4 Install the t-valve on to the tank.
- 5 Connect the 7/8" water supply hose to the water shutoff valve and t-valve.
- 6 Connect the 1/2" water supply hose to the bidet seat and t-valve.
- 7 Open the water shutoff valve.
- 8 Check for any leaking or dripping.